

## CodeSign


1)

```
makecert -n "cn=codesigntest" -sv codesigntest.pvk codesigntest.cer
```

```
C:\#codesign>makecert -n "cn=codesigntest" -sv codesigntest.pvk codesigntest.cer
Succeeded

C:\#codesign>
```

2)

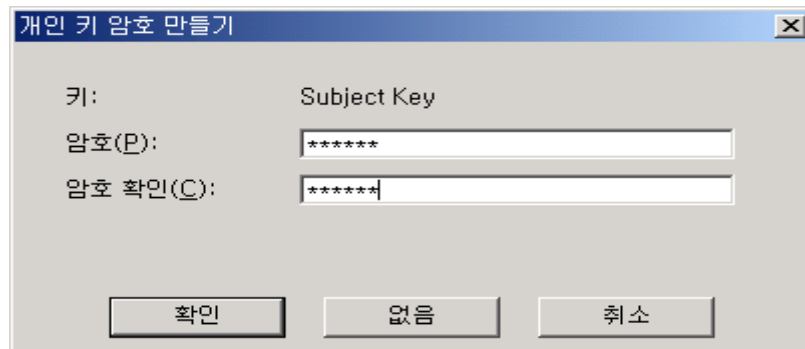


개인 키 암호 만들기

키: Subject Key

암호(P): \*\*\*\*\*

암호 확인(C): \*\*\*\*\*

확인 없음 취소

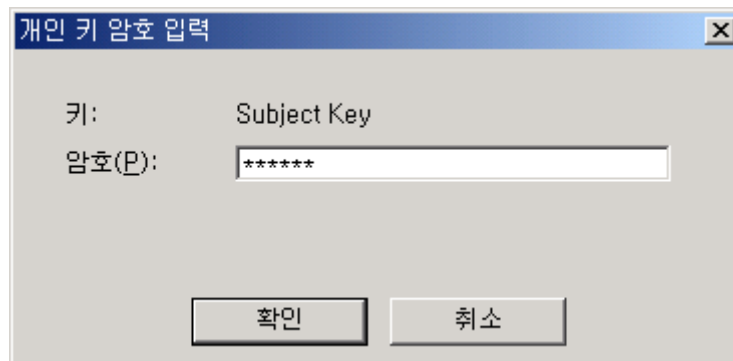

개인 키 암호 입력

키: Subject Key

암호(P): \*\*\*\*\*

확인 취소

codesigntest.pvk codesigntest.cer

3)

cer spc

```
Cert2spc codesigntest.cer codesigntest.spc
```

```
C:\#codesign>cert2spc codesigntest.cer codesigntest.spc
Succeeded
```


4)

```
signcode -spc codesigntest.spc -v codesigntest.pvk -n "codesign test" crosscert.cab
```

```
C:\#codesign>signcode -spc codesigntest.spc -v codesigntest.pvk -n "codesign test" crosscert.cab
Warning: This file is signed, but not timestamped.
Succeeded
```

timestamp


5)

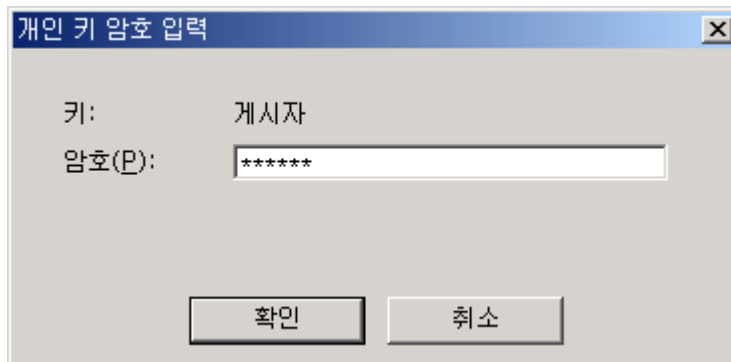

6)

```
Chktrust [ ]
```

```
C:\#codesign>chktrust crosscert.cab
crosscert.cab: Succeeded
```

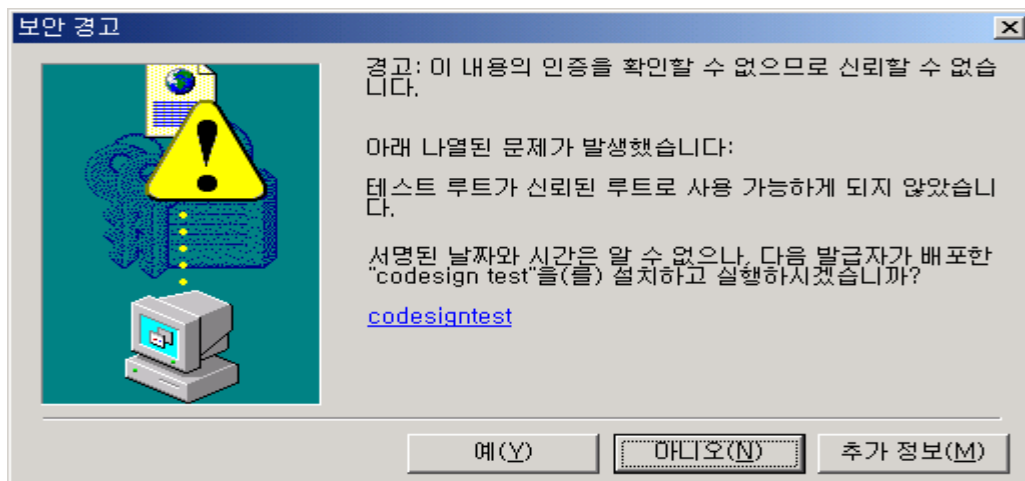

## <SignCode option>

**-spc** spc file : SPC  
**-v** pvk file :  
**-k** KeyName :  
**-n** name :  
**-i** info : 가 ( :URL)  
**-p** provider :  
**-y** type :  
**-ky** keytype : <SIGNATURE|EXCHANGE| >  
**-\$** authority :  
**-a** algorithm : sign . <md5|sha1> . MD5가  
**-t** URL : Timestamp HTTP  
**-tr** Number : Timestamp ( ) 0  
**-j** DllName : 가 Dll ( : )  
**-jp** Param : Dll Parameter  
**-c** File : spc X.509  
**-s** Store : 가 , my store  
**-r** Location : . currentUser  
**-sp** Policy : 가 SPC (Store)  
가 가 . . spcstore.  
**-cn** Name : ( )  
**-x** : Timestamp